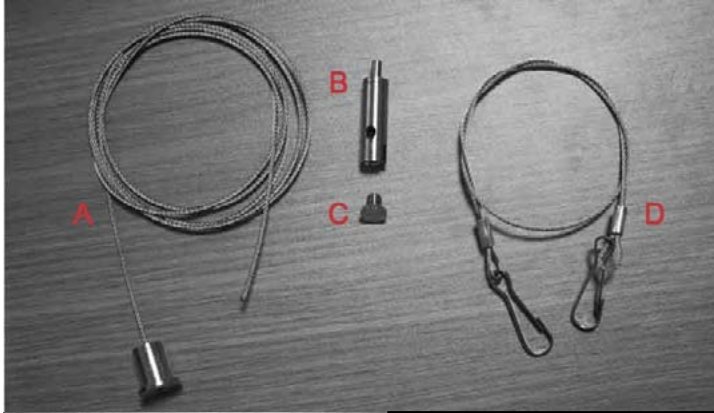

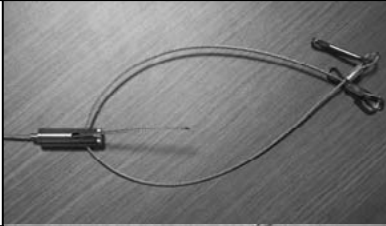








STARKLED Hanging Kit Instruction

		<p>First of all, please check the hang-kit package to make sure you have all components.</p> <p>Part A x 2 Part B x 2 Part C x 2 Part D x 2</p>	
	<p>Step 1 Put D into the gap of C, then screw C on to fix A</p>		<p>Step 2 Put the end of A into B from the top hole, B will fix A</p>
	<p>Step 3 Press the top of B to adjust (back up) A</p>		<p>Step 4 Screw off the head of A, need 2 extra 4mm screws.</p>
	<p>Step 5 Mount A on the mounting surface. Need a screwdriver</p>		<p>Step 6 Screw on the cap</p>
	<p>Step 7 Mount D to the fixture, hook the existing clasps</p>		<p>Additional Choose Binding A on your bracket</p>

Notice:

1. Do not use the hanging kits if the grip lock (part B) can not lock the cable (part A).
2. Hanging kits are made by metals which convey electricity, make sure mounting the hanging kits with all power off, or we will not be responsible for any damage.
3. We will not be responsible for any damage if the mounting surface is not firm enough.
4. Make sure to hold the fixture when pressing the top of grip lock (part B) to adjust the height, or we will not be responsible for any damage.